

407-BBQV-A
40GBASE, QSFP+, LR4M Transceiver

Features

- 4 Parallel lanes design
- Up to 11.2Gb/s data rate per channel
- Aggregate Bandwidth of up to 44.0G
- QSFP+ MSA compliant
- Up to 10km transmission on single mode fiber (SMF)
- Maximum power consumption 3.5W
- Single +3.3V power supply
- Operating case temperature: 0 to 70oC
- RoHS-6 compliant

1. General Description

This product is a parallel 40Gb/s Quad Small Form-factor Pluggable (QSFP+) optical module. It provides increased port density and total system cost savings. The QSFP+ full-duplex optical module offers 4 independent transmit and receive channels, each capable of 10Gb/s operation for an aggregate data rate of 40Gb/s on 10km of single mode fiber.

An optical fiber ribbon cable with an MTP/MPO connector can be plugged into the QSFP+ module receptacle. Proper alignment is ensured by the guide pins inside the receptacle. The cable usually cannot be twisted for proper channel to channel alignment. Electrical connection is achieved through a z-pluggable 38-pin connector per MSA requirement.

The module operates with single +3.3V power supply. LVCMOS/LVTTL global control signals, such as Module Present, Reset, Interrupt and Low Power Mode, are available with the modules. A 2-wire serial interface is available to send and receive more complex control signals, and to receive digital diagnostic information. Individual channels can be addressed and unused channels can be shut down for maximum design flexibility.

The product is designed with form factor, optical/electrical connection and digital diagnostic interface



Applications

- 40G Ethernet
- Infiniband QDR, DDR and SDR
- Datacenter and Enterprise networking

according to the QSFP+ Multi-Source Agreement (MSA). It has been designed to meet the harshest external operating conditions including temperature, humidity and EMI interference. The module can be managed through the I2C two-wire serial interface.

2. Functional Description

This product is a QSFP+ parallel single mode optical transceiver with an MTP/MPO fiber ribbon connector. The transmitter module accepts electrical input signals compatible with Common Mode Logic (CML) levels. All input data signals are differential and internally terminated. The receiver module converts parallel optical input signals via a photo detector array into parallel electrical output signals. The receiver module outputs electrical signals are also voltage compatible with Common Mode Logic (CML) levels. All data signals are differential and support a data rates up to 10.3Gb/s per channel. Figure 1 shows the functional block diagram of this product.

A single +3.3V power supply is required to power up the module. Both power supply pins VccTx and VccRx are internally connected and should be applied concurrently. Per MSA the module offers 7 low speed hardware control pins (including the 2-wire serial interface): ModSelL, SCL, SDA, ResetL, LPMode, ModPrsL and IntL.

Module Select (ModSelL) is an input pin. When held low by the host, the module responds to 2-wire serial communication commands. The ModSelL allows the use of multiple QSFP+ modules on a single 2-wire interface bus – individual ModSelL lines for each QSFP+ module must be used.

Serial Clock (SCL) and Serial Data (SDA) are required for the 2-wire serial bus communication interface and enable the host to access the QSFP+ memory map.

The ResetL pin enables a complete module reset, returning module settings to their default state, when a low level on the ResetL pin is held for longer than the minimum pulse length. During the execution of a reset the host shall disregard all status bits until the module indicates a completion of the reset interrupt. The module indicates this by posting an IntL (Interrupt) signal with the Data_Not_Ready bit negated in the memory map. Note that on power up (including hot insertion) the module should post this completion of reset interrupt without requiring a reset.

Low Power Mode (LPMode) pin is used to set the maximum power consumption for the module in order to protect hosts that are not capable of cooling higher power modules, should such modules be accidentally inserted.

Module Present (ModPrsL) is a signal local to the host board which, in the absence of a module, is normally pulled up to the host Vcc. When a module is inserted into the connector, it completes the path to ground through a resistor on the host board and asserts the signal. ModPrsL then indicates a module is present by setting ModPrsL to a "Low" state.

Interrupt (IntL) is an output pin. Low indicates a possible module operational fault or a status critical to the host system. The host identifies the source of the interrupt using the 2-wire serial interface. The IntL pin is an open collector output and must be pulled to the Host Vcc voltage on the Host board.

3. Transceiver Block Diagram

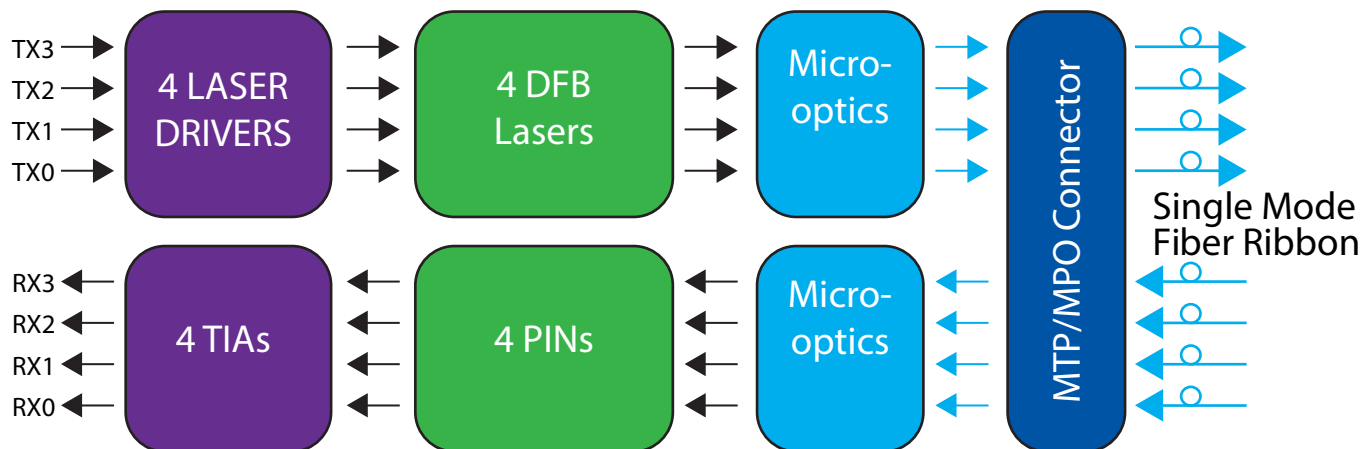


Figure 1. Transceiver Block Diagram

4. Pin Assignment and Description

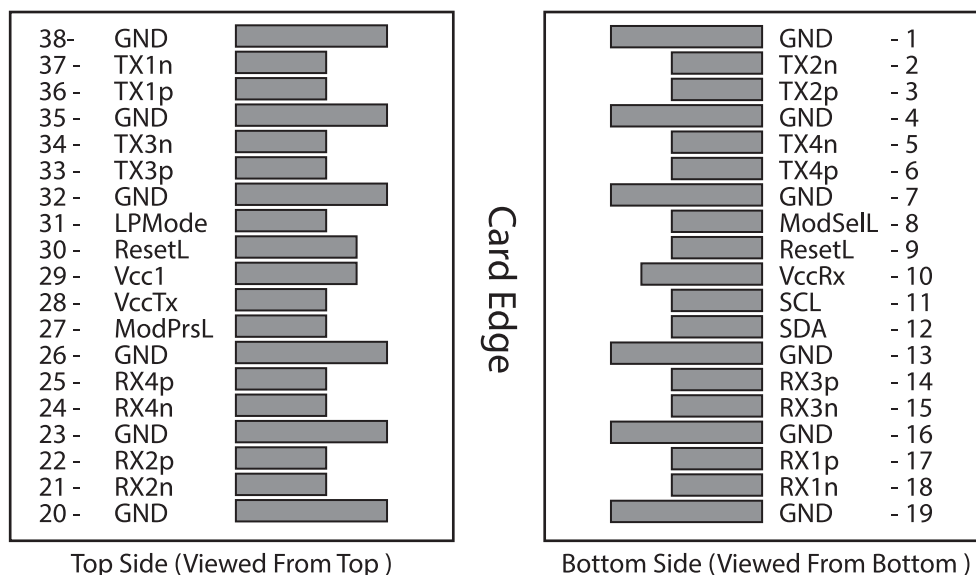


Figure 2. QSFP+ Transceiver Electrical Connector Layout

| Pin | Logic | Symbol | Name/Description | Notes |
|-----|---------|---------|---|-------|
| 1 | | GND | Module Ground | 1 |
| 2 | CML-I | Tx2n | CH2 Transmitter Inverted Data Input | |
| 3 | CML-I | Tx2p | CH2 Transmitter Non-inverted Data Input | |
| 4 | | GND | Module Ground | 1 |
| 5 | CML-I | Tx4n | CH4 Transmitter Inverted Data Input | |
| 6 | CML-I | Tx4p | CH4 Transmitter Non-inverted Data Input | |
| 7 | | GND | Module Ground | 1 |
| 8 | LVTTL-I | ModSelL | Module Select | |

407-BBQV-A

40GBASE, QSFP+, LR4M, (SM)

1264.5 NM - 1337.5 NM, 10 KM REACH, MPO

| Pin | Logic | Symbol | Name/Description | Notes |
|-----|-------------|---------|---|-------|
| 9 | LVTTL-I | ResetL | Module Reset | |
| 10 | | VccRX | +3.3V Power Supply Receiver | 2 |
| 11 | LVC MOS-I/O | SCL | 2-wire serial interface clock | |
| 12 | LVC MOS-I/O | SDA | 2-wire serial interface data | |
| 13 | | GND | Module Ground | |
| 14 | CML-O | Rx3p | CH3 Receiver Non-inverted Data Input | |
| 15 | CML-O | Rx3n | CH3 Receiver Inverted Data Input | |
| 16 | | GND | Module Ground | 1 |
| 17 | CML-O | Rx1p | CH1 Receiver Non-inverted Data Input | |
| 18 | CML-O | Rx1n | CH1 Receiver Inverted Data Input | |
| 19 | | GND | Module Ground | 1 |
| 20 | | GND | Module Ground | 1 |
| 21 | CML-O | Rx2n | CH2 Receiver Inverted Data Input | |
| 22 | CML-O | Rx2p | CH2 Receiver Non-inverted Data Input | |
| 23 | | GND | Module Ground | 1 |
| 24 | CML-O | Rx4n | CH4 Receiver Inverted Data Input | |
| 25 | CML-O | Rx4p | CH4 Receiver Non-inverted Data Input | |
| 26 | | GND | Module Ground | 1 |
| 27 | LVTTL-O | ModPrsL | Module Present | 1 |
| 28 | LVTTL-O | IntL | Interrupt | |
| 29 | | VccTX | +3.3V Power Supply Transmitter | 2 |
| 30 | | Vcc1 | +3.3V Power Supply | 2 |
| 31 | LVTTL-I | LPMODE | Low Power Mode | |
| 32 | | GND | Module Ground | 1 |
| 33 | CML-I | Tx3p | CH3 Transmitter Non-inverted Data Input | |
| 34 | CML-I | Tx3n | CH3 Transmitter Inverted Data Input | |
| 35 | | GND | Module Ground | 1 |
| 36 | CML-I | Tx1p | CH1 Transmitter Non-inverted Data Input | |
| 37 | CML-I | Tx1n | CH1 Transmitter Inverted Data Input | |
| 38 | | GND | Module Ground | 1 |

Notes:

1. GND is the symbol for signal and supply (power) common for QSFP+ modules. All are common within the QSFP+ module and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal common ground plane.
2. VccRx, Vcc1 and VccTx are the receiver and transmitter power suppliers and shall be applied concurrently. Recommended host board power supply filtering is shown in Figure 3 below. Vcc Rx, Vcc1 and VccTx may

be internally connected within the QSFP+ transceiver module in any combination. The connector pins are each rated for a maximum current of 500mA.

5. Recommended Power Supply Filter

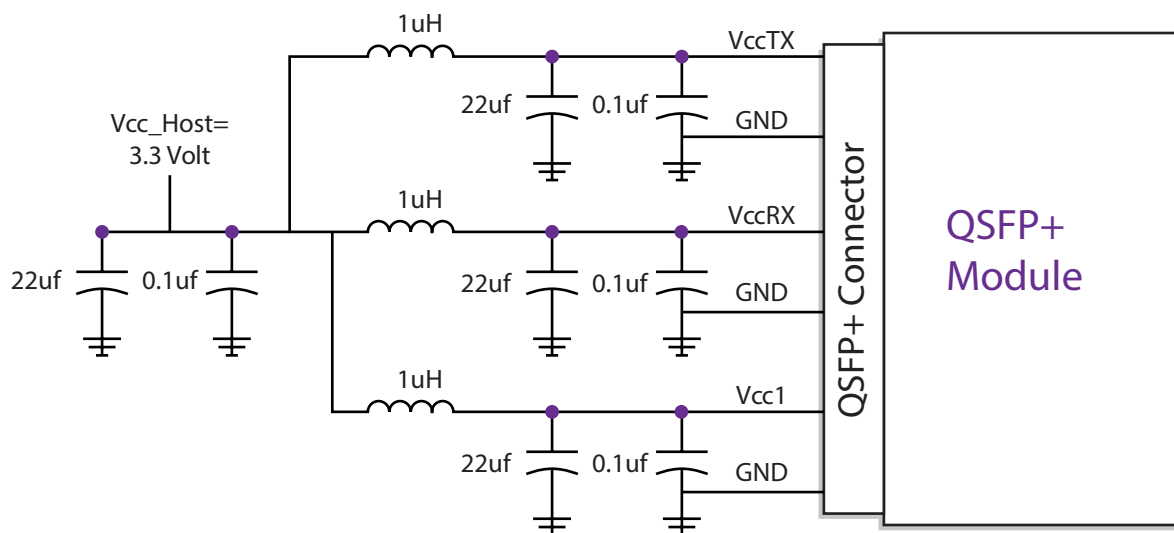


Figure 3. Recommended Power Supply Filter

6. Absolute Maximum Ratings

These values represent the damage threshold of the module. Stress in excess of any of the individual maximum ratings can cause damage to the module even if all other parameters are within recommended Operating conditions.

| Parameter | Symbol | Min. | Max. | Unit |
|-----------------------------|--------|------|------|------|
| Storage Temperature | Ts | -40 | 85 | °C |
| Operating Case Temperature | Top | 0 | 70 | °C |
| Power supply Voltage | Vcc | -0.5 | 3.6 | V |
| Relative Humidity | RH | 0 | 85 | % |
| Damage Threshold, each Lane | THd | 3.3 | | dBm |

7. Recommended Operating Conditions

| Parameter | Symbol | Min. | Typ. | Max. | Unit |
|----------------------------|--------|-------|---------|-------|------|
| Operating Case Temperature | TC | 0 | | +70 | °C |
| Power Supply Voltage | Vcc | 3.135 | 3.3 | 3.465 | V |
| Data Rate, each Lane | | | 10.3125 | 11.2 | Gb/s |
| Control Input Voltage High | | 2 | | Vcc | V |
| Control Input Voltage Low | | 0 | | 0.8 | V |
| Link Distance with G.642 | D | 0.002 | | 10 | km |

8. Electrical Characteristics

The following electrical characteristics are defined over the Recommended Operating Environment unless otherwise specified

| Parameter | Symbol | Min | Typ | Max | Units | Notes |
|---|---------|---------------------------|-----|------|-------|-------------------------------|
| Power Consumption | | | | 3.5 | W | |
| Supply Current | Icc | | | 1.1 | A | |
| Transceiver Power-on Initialization Time | | | | 2000 | ms | |
| Transmitter (each Lane) | | | | | | |
| Parameter | Symbol | Min | Typ | Max | Units | Notes |
| Single-ended Input Voltage Tolerance (Note 2) | | -0.3 | | 4.0 | V | Referred to TP1 signal common |
| AC Common Mode Input Voltage Tolerance | | 15 | | | mV | RMS |
| Differential Input Voltage Swing Threshold | | 50 | | | mVpp | LOSA Threshold |
| Differential Input Voltage Swing | Vin,pp | 190 | | 700 | mVpp | |
| Differential Input Impedance | Zin | 90 | 100 | 110 | Ohm | |
| Differential Input Return Loss | | See IEEE 802.3ba 86A.4.11 | | | dB | 10MHz-11.1GHz |
| J2 Jitter Tolerance | Jt2 | 0.17 | | | UI | |
| J9 Jitter Tolerance | Jt9 | 0.29 | | | UI | |
| Data Dependent Pulse Width Shrinkage (DDPWS) Tolerance | | 0.07 | | UI | | |
| Eye Mask Coordinates {X1, X2 Y1, Y2} | | 0.11, 0.31 95, 350 | | | UI mV | Hit Ratio = 5x10-5 |
| Receiver (each Lane) | | | | | | |
| Parameter | Symbol | Min | Typ | Max | Units | Notes |
| Single-ended Output Voltage | | -0.3 | | 4.0 | V | Referred to signal common |
| AC Common Mode Output Voltage | | | | 7.5 | mV | RMS |
| Differential Output Voltage Swing | Vout,pp | 300 | | 850 | mVpp | |

| Receiver (each Lane) | | | | | | |
|--------------------------------------|--------|----------------------------|-----|------|-------|--------------------------------|
| Parameter | Symbol | Min | Typ | Max | Units | Notes |
| Differential Output Impedance | Zout | 90 | 100 | 110 | Ohm | |
| Termination Mismatch at 1MHz | | | | 5 | % | |
| Differential Output Return Loss | | See IEEE 802.3ba 86A.4.2.1 | | | dB | 10MHz-11.1GHz |
| Common Mode Output Return Loss | | See IEEE 802.3ba 86A.4.2.2 | | | dB | 10MHz-11.1GHz |
| Output Transition Time | | 28 | | | ps | 20% to 80% |
| J2 Jitter Output | Jo2 | | | 0.42 | UI | |
| J9 Jitter Output | Jo9 | | | 0.65 | UI | |
| Eye Mask Coordinates {X1, X2 Y1, Y2} | | 0.29, 0.5 150, 425 | | | UI mV | Hit Ratio = 5x10 ⁻⁵ |

Notes:

1. Power-on Initialization Time is the time from when the power supply voltages reach and remain above the minimum recommended operating supply voltages to the time when the module is fully functional.
2. The single ended input voltage tolerance is the allowable range of the instantaneous input signals.

9. Optical Characteristics

All parameters are specified under the recommended operating conditions with PRBS31 data pattern unless otherwise specified.

| Transmitter | | | | | | |
|---|-------------|------|------|------|-------|-------|
| Parameter | Symbol | Min | Typ | Max | Units | Notes |
| Center Wavelength | λ_C | 1260 | 1310 | 1355 | nm | |
| Side Mode Suppression Ratio | SMSR | 30 | | | dB | |
| Total Average Launch Power | PT | | | 7.5 | dBm | |
| Average Launch Power, each Lane | PAVG | -5.5 | | 1.5 | dBm | 1 |
| Optical Modulation Amplitude (OMA), each Lane | POMA | -4.5 | | 2.5 | dBm | 2 |
| Difference in Launch Power between any Two Lanes (OMA) | Ptx,diff | | | 6.5 | dB | |
| Launch Power in OMA minus Transmitter and Dispersion Penalty (TDP), each Lane | | -5.5 | | | dBm | |

| Transmitter | | | | | | |
|--|-------------|------------------------------------|------|-------|-------|------------------|
| Parameter | Symbol | Min | Typ | Max | Units | Notes |
| TDP, each Lane | TDP | | 3.2 | dB | | |
| Extinction Ratio | ER | 3.5 | | | dB | |
| Relative Intensity Noise | RIN | | | -128 | dB/Hz | |
| Optical Return Loss Tolerance | TOL | | | 12 | dB | |
| Transmitter Reflectance | RT | | | -12 | dB | |
| Average Launch Power OFF Transmitter, each Lane | Poff | | | -30 | dBm | |
| Transmitter Eye Mask Definition {X1, X2, X3, Y1, Y2, Y3} | | {0.25, 0.4, 0.45, 0.25, 0.28, 0.4} | | | | |
| Receiver | | | | | | |
| Parameter | Symbol | Min | Typ | Max | Units | Notes |
| Center Wavelength | λ_C | 1260 | 1310 | 1355 | nm | |
| Damage Threshold, each Lane | THd | 3.3 | | | dBm | 3 |
| Average Receive Power, each Lane | | -12.6 | | 1.5 | dBm | |
| Receiver Reflectance | RR | | | -12 | dB | |
| Receive Power (OMA), each Lane | | | | 2.5 | dBm | |
| Receiver Sensitivity (OMA), each Lane | SEN | | | -12.6 | dBm | Informa- tive |
| Difference in Receive Power between any Two Lanes (OMA) | Prx,diff | | | 7.5 | dB | |
| LOS Assert | LOSA | -30 | | | dBm | |
| LOS Deassert | LOSD | | | -15 | dBm | |
| LOS Hysteresis | LOSH | 0.5 | | | dB | |
| Receiver Electrical 3 dB upper Cutoff Frequency, each Lane | Fc | | | 12.3 | GHz | |

Notes:

1. The maximum transmitter average optical power of 1.5 dBm is well within the guardband of receiver overload specifications of commercially available 10GBASE-LR SFP+ transceivers.
2. Even if the TDP < 1 dB, the OMA min must exceed the minimum value specified here.
3. The receiver shall be able to tolerate, without damage, continuous exposure to a modulated optical input signal having this power level on one lane. The receiver does not have to operate correctly at this input power.

10. Digital Diagnostic Functions


The following digital diagnostic characteristics are defined over the normal operating conditions unless otherwise specified.

| Parameter | Symbol | Min | Max | Units | Notes |
|---|--------------|------|-----|-------|----------------------------------|
| Temperature monitor absolute error | DMI_Temp | -3 | 3 | degC | Over operating temperature range |
| Supply voltage monitor absolute error | DMI_VCC | -0.1 | 0.1 | V | Over full operating range |
| Channel RX power monitor absolute error | DMI_RX_Ch | -2 | 2 | dB | 1 |
| Channel Bias current monitor | DMI_Ibias_Ch | -10% | 10% | mA | |
| Channel TX power monitor absolute error | DMI_TX_Ch | -2 | 2 | dB | 1 |

Notes:

1. Due to measurement accuracy of different single mode fibers, there could be an additional +/- 1 dB fluctuation, or a +/- 3 dB total accuracy.

11. Package Dimentions (Unit: MM)

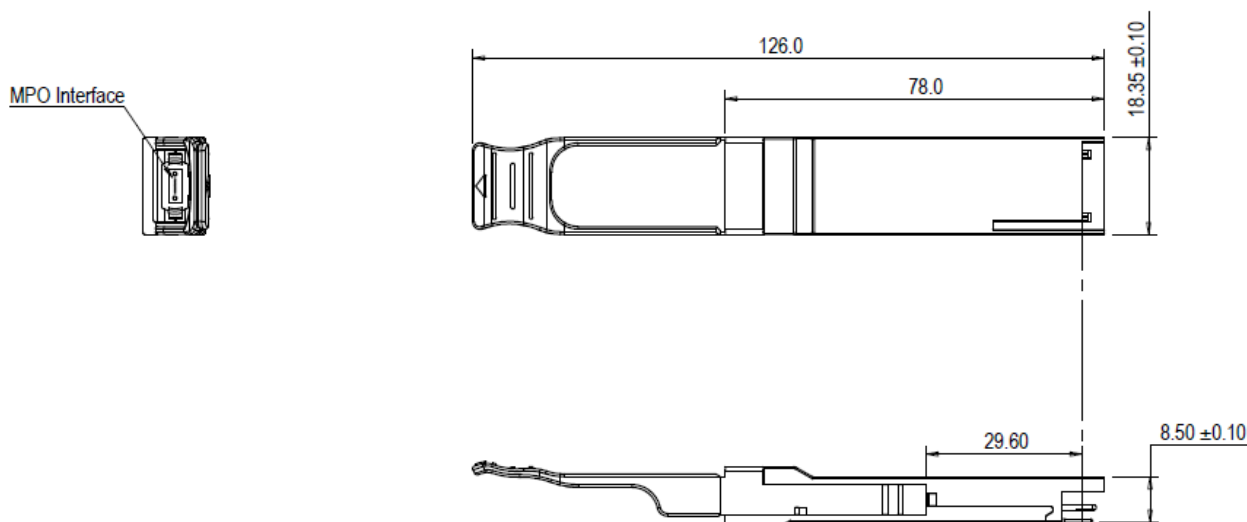

407-BBQV-A

40GBASE, QSFP+, LR4M, (SM)

1264.5 NM - 1337.5 NM, 10 KM REACH, MPO

12. Contact Information

Approved Networks is a leading supplier of Network Transceivers and Connectivity products to Channel Partners, Resellers, and OEMs. With more than 9 years of direct industry experience, our products are resident in the most demanding and mission critical functional networks Worldwide. We serve as a Master Distributor to the largest CMs in the world and deploy the most rigorous testing and firmware management programs to bring the highest level of functional product to the market at a cost that makes sense.

Corporate Offices: **Approved Networks, Inc.**

Tel: 800.590.9535

Web: <http://www.approvednetworks.com>