

## AN-SFP10G-LRM

10GBASE, SFP+, LRM, (MM)  
1310 NM, 220 M REACH, LC

## AN-SFP10G-LRM

10GBASE, SFP+, LRM Transceiver

### Features

- Up to 11.1Gbps Data Links
- Maximum link length of 220M MMF
- Power dissipation < 1W
- 1310nm FP transmitter, PIN photo-detector
- Metal enclosure, for lower EMI
- 2-wire interface with integrated Digital Diagnostic monitoring | Hot-pluggable SFP+ footprint
- Specifications compliant with SFF 8472
- Compliant with SFP+ MSA with LC connector
- Single 3.3V power supply
- Case operating temperature range: 0°C to 70°C



### Applications

- 10GBASE-LRM

### Standard

- Compliant to SFP+ SFF-8431
- Compliant to 802.3aq 10GBASE-LRM
- RoHS Compliant.

### 1. Description

The Approved Networks AN-SFP10G-LRM SFP+ LRM is an optical transceiver module for transmission at 1310nm over legacy multimode fibre. Supporting the 10GBASE-LRM Ethernet standard makes it ideally suited for 10G datacom. It's very low power consumption and its excellent EMI performance allow system design with high port density. The small form factor integrates a 1310nm Fabry-Perot (FP) laser in an LC package and a linear multimode PIN receiver. The module is lead free, RoHS compliant and is designed and tested in accordance with industry safety standards.

The transceiver is a linear-interface transceiver that enables, in conjunction with an Electronic Dispersion Compensation (EDC) on the host board, an IEEE802.3aq 10GBASE-LRM compliant link. The host board EDC provides correction for the severe modal dispersion that may occur during propagation through multimode fibre links, including legacy installed FDDI multimode fibre (see IEEE802.3aq for detailed information regarding fibre coverage).

**2. Absolute Maximum Ratings**

| Parameter            | Symbol | Min.    | Typical | Max.    | Unit | Notes |
|----------------------|--------|---------|---------|---------|------|-------|
| Storage Temperature  | Ts     | -40     | -       | 85      | °C   |       |
| Relative Humidity    | RH     | 5       | -       | 95      | %    |       |
| Power Supply Voltage | VCC    | -0.3    | -       | 4       | V    |       |
| Signal Input Voltage |        | Vcc-0.3 | -       | Vcc+0.3 | V    |       |

**3. Recommended Operating Conditions**

| Parameter                  | Symbol           | Min. | Typical | Max. | Unit | Notes            |
|----------------------------|------------------|------|---------|------|------|------------------|
| Case Operating Temperature | Tcase            | 0    | -       | 70   | °C   | Without air flow |
| Power Supply Voltage       | VCC              | 3.14 | 3.3     | 3.47 | V    |                  |
| Power Supply Current       | ICC              | -    |         | 300  | mA   |                  |
| Data Rate                  | BR               |      | 10.3125 |      | Gbps |                  |
| Transmission Distance      | TD               |      | -       | 220  | m    |                  |
| Coupled Fiber              | Multi mode fiber |      |         |      |      | MMF              |

**4. Optical Characteristics**

| Transmitter              |                             |      |         |      |       |       |
|--------------------------|-----------------------------|------|---------|------|-------|-------|
| Parameter                | Symbol                      | Min. | Typical | Max. | Unit  | Notes |
| Average Launch Power     | Pout                        | -6.5 |         | 0.5  | dBm   | 1     |
| Optical Wavelength       | $\lambda$                   | 1260 |         | 1355 | nm    |       |
| Optical Extinction Ratio | ER                          | 3.5  |         |      | dB    |       |
| RIN                      | RIN                         |      |         | -128 | dB/Hz |       |
| Output Eye Mask          | Compliant with IEEE 802.3aq |      |         |      |       |       |
| Receiver                 |                             |      |         |      |       |       |
| Parameter                | Symbol                      | Min. | Typical | Max. | Unit  | Notes |
| Receiver Sensitivity     | Sen                         |      |         | -10  | dBm   | 2     |
| Input Saturation Power   | Psat                        | 1.5  |         |      | dBm   |       |
| Wavelength Range         | $\lambda_C$                 | 1260 |         | 1335 | nm    |       |
| LOS De -Assert           | LOSD                        |      |         | -11  | dBm   |       |
| LOS Assert               | LOSA                        | -30  |         |      | dBm   |       |
| LOS Hysteresis           |                             | 0.5  |         |      | dB    |       |

**Notes:**

1. Average power figures are informative only, per IEEE802.3aq
2. Conditions of stressed receiver tests per IEEE802.3aq.


**5. Electrical Characteristics**

| Parameter                      | Symbol     | Min.    | Typical | Max.    | Unit | Notes |
|--------------------------------|------------|---------|---------|---------|------|-------|
| Supply Voltage                 | Vcc        | 3.14    | 3.3     | 3.46    | V    |       |
| Supply Current                 | Icc        |         |         | 300     | mA   |       |
| Transmitter                    |            |         |         |         |      |       |
| Parameter                      | Symbol     | Min.    | Typical | Max.    | Unit | Notes |
| Input differential impedance   | Rin        |         | 100     |         | Ω    | 1     |
| Single ended data input swing  | Vin,pp     | 180     |         | 700     | mV   |       |
| Transmit Disable Voltage       | VD         | Vcc-1.3 |         | Vcc     | V    |       |
| Transmit Enable Voltage        | VEN        | Vee     |         | Vee+0.8 | V    | 2     |
| Transmit Disable Assert Time   |            |         |         | 10      | us   |       |
| Receiver                       |            |         |         |         |      |       |
| Parameter                      | Symbol     | Min.    | Typical | Max.    | Unit | Notes |
| Differential data output swing | Vout,pp    | 300     |         | 850     | mV   | 3     |
| Data output rise time          | tr         | 30      |         |         | ps   | 4     |
| Data output fall time          | tf         | 30      |         |         | ps   | 4     |
| LOS Fault                      | VLOS fault | Vcc-1.3 |         | VccHOST | V    | 5     |
| LOS Normal                     | VLOS norm  | Vee     |         | Vee+0.8 | V    | 5     |
| Power Supply Rejection         | PSR        | 100     |         |         | mVpp | 6     |

**Notes:**

1. Connected directly to TX data input pins. AC coupled thereafter.
2. Or open circuit.
3. Into 100 ohms differential termination.
4. These are unfiltered 20-80% values
5. Loss Of Signal is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.
6. Receiver sensitivity is compliant with power supply sinusoidal modulation of 20 Hz to 1.5 MHz up to specified value applied through the recommended power supply filtering network.

## 6. Pin Descriptions

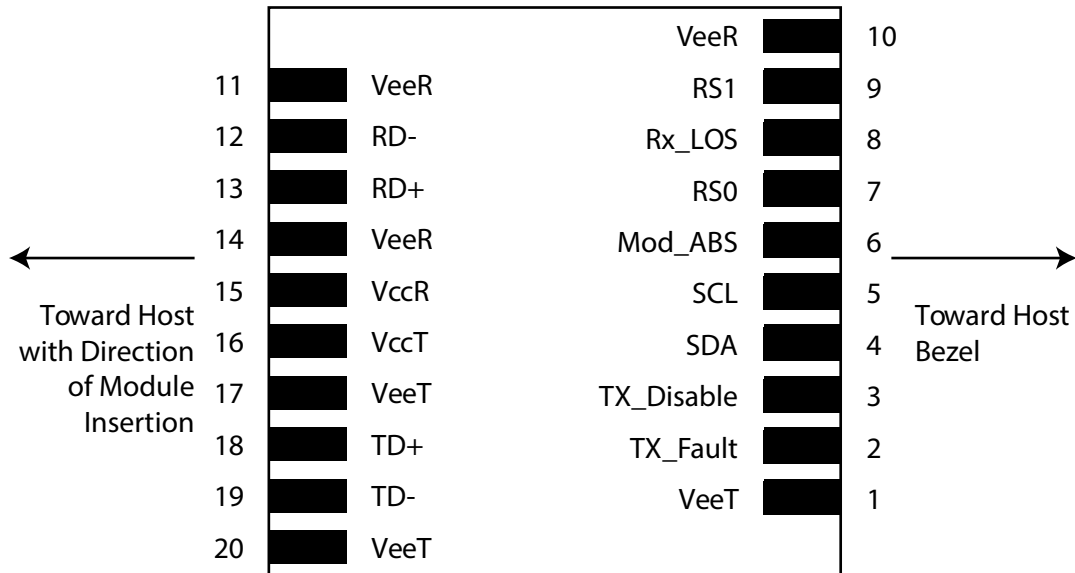

Pin out of Connector Block on Host Board

| Pin | Symbol  | Name/Description   | Notes |
|-----|---------|--|-------|
| 1   | VeeT    | Transmitter Ground (Common with Receiver Ground)               | 1     |
| 2   | Tfault  | Transmitter Fault.   | 2     |
| 3   | Tdis    | Transmitter Disable. Laser output disabled on high or open.    | 3     |
| 4   | SDA     | 2-wire Serial Interface Data Line                              | 4     |
| 5   | SCL     | 2-wire Serial Interface Clock Line                             | 4     |
| 6   | MOD_ABS | Module Absent. Grounded within the module                      | 4     |
| 7   | RS0     | Rate Select 0  | 5     |
| 8   | LOS     | Loss of Signal indication. Logic 0 indicates normal operation. | 6     |
| 9   | RS1     | No connection required   | 1     |
| 10  | VeeR    | Receiver Ground (Common with Transmitter Ground)               | 1     |
| 11  | VeeR    | Receiver Ground (Common with Transmitter Ground)               | 1     |
| 12  | RD-     | Receiver Inverted DATA out. AC Coupled                         |       |
| 13  | RD+     | Receiver Non-inverted DATA out. AC Coupled                     |       |
| 14  | VeeR    | Receiver Ground (Common with Transmitter Ground)               | 1     |
| 15  | VccR    | Receiver Power Supply  |       |
| 16  | VccT    | Transmitter Power Supply                                       |       |
| 17  | VeeT    | Transmitter Ground (Common with Receiver Ground)               | 1     |
| 18  | TD+     | Transmitter Non-Inverted DATA in. AC Coupled.                  |       |
| 19  | TD-     | Transmitter Inverted DATA in. AC Coupled.                      |       |
| 20  | VeeT    | Transmitter Ground (Common with Receiver Ground)               | 1     |

**Notes:**

1. Circuit ground is internally isolated from chassis ground.
2. TFAULT is an open collector/drain output, which should be pulled up with a 4.7k – 10k Ohms resistor on the host board if intended for use. Pull up voltage should be between 2.0V to  $V_{cc} + 0.3V$ . A high output indicates a transmitter fault caused by either the TX bias current or the TX output power exceeding the preset alarm thresholds. A low output indicates normal operation. In the low state, the output is pulled to  $<0.8V$ .
3. Laser output disabled on TDIS  $>2.0V$  or open, enabled on TDIS  $<0.8V$ .
4. Should be pulled up with 4.7k $\Omega$ - 10k $\Omega$  host board to a voltage between 2.0V and 3.6V. MOD\_ABS pulls line low to indicate module is plugged in.
5. Internally pulled down per SFF-8431 Rev 4.1.
6. LOS is open collector output. It should be pulled up with 4.7k $\Omega$  – 10k $\Omega$  on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

**7. Digital Diagnostic Functions**

Approved Networks SFP+ LRM transceivers support the 2-wire serial communication protocol as defined in the SFP+ MSA.


The standard SFP serial ID provides access to identification information that describes the transceiver's capabilities, standard interfaces, manufacturer, and other information.

Additionally, Approved Networks SFP+ transceivers provide a unique enhanced digital diagnostic monitoring interface, which allows real-time access to device operating parameters such as transceiver temperature, laser bias current, transmitted optical power, received optical power and transceiver supply voltage. It also defines a sophisticated system of alarm and warning flags, which alerts end-users when particular operating parameters are outside of a factory set normal range.

The SFP+ MSA defines a 256-byte memory map in EEPROM that is accessible over a 2-wire serial interface at the 8 bit address 1010000X (A0h). The digital diagnostic monitoring interface makes use of the 8 bit address 1010001X (A2h), so the originally defined serial ID memory map remains unchanged.

The operating and diagnostics information is monitored and reported by a Digital Diagnostics Transceiver Controller (DDTC) inside the transceiver, which is accessed through a 2-wire serial interface. When the serial protocol is activated, the serial clock signal (SCL, Mod Def 1) is generated by the host. The positive edge clocks data into the SFP transceiver into those segments of the E2PROM that are not write-protected. The negative edge clocks data from the SFP transceiver. The serial data signal (SDA, Mod Def 2) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially.

**8. Host - Transceiver Interface Block Diagram**





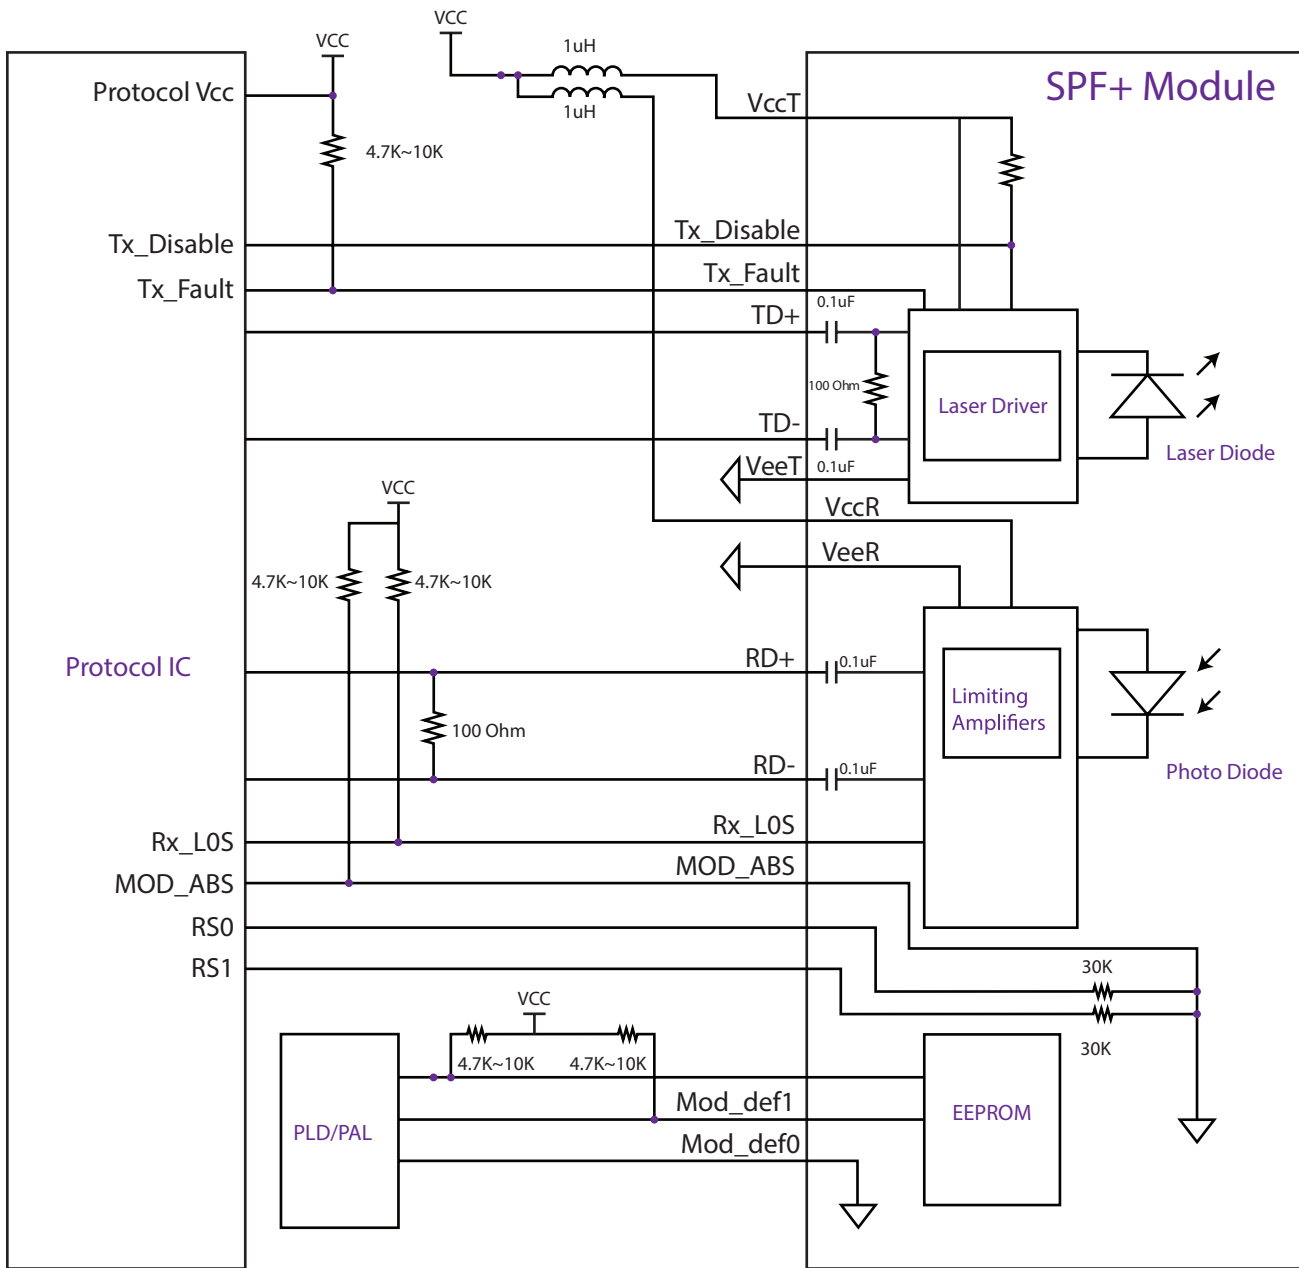


# AN-SFP10G-LRM

10GBASE, SFP+, LRM, (MM)

1310 NM, 220 M REACH, LC

## 9. Outline Dimensions

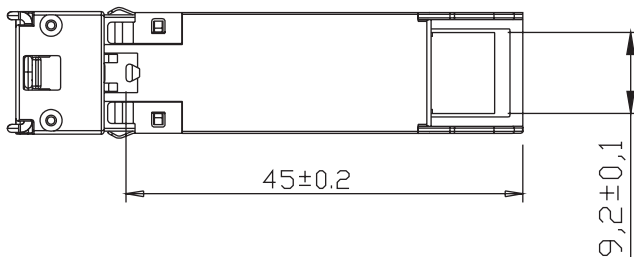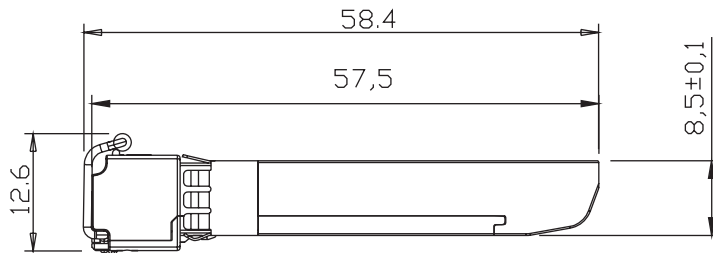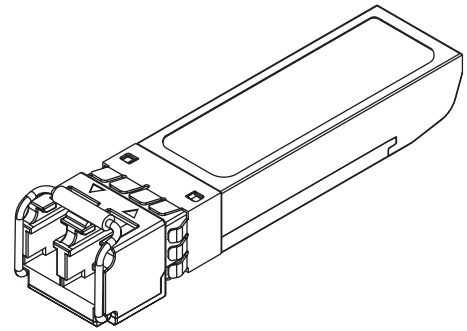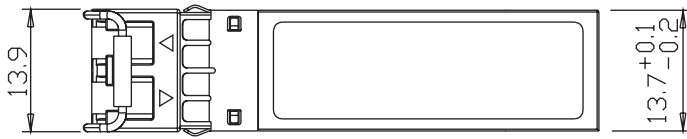

Units in MM

## 10. Regulatory Compliance

| Feature                            | Reference   | Performance               |
|------------------------------------|---|---------------------------|
| Electrostatic discharge(ESD)       | IEC/EN 61000-4-2                                    | Compatible with standards |
| Electromagnetic Interference (EMI) | FCC Part 15 Class B EN 55022<br>Class B (CISPR 22A) | Compatible with standards |
| Laser Eye Safety                   | FDA 21CFR 1040.10, 1040.11<br>IEC/EN 60825-1,2      | Class 1 laser product     |
| Component Recognition              | IEC/EN 60950, UL                                    | Compatible with standards |
| ROHS                               | 2002/95/EC  | Compatible with standards |
| EMC                                | EN61000-3   | Compatible with standards |

## AN-SFP10G-LRM

10GBASE, SFP+, LRM, (MM)

1310 NM, 220 M REACH, LC

### 11. Contact Information

Approved Networks is a leading supplier of Network Transceivers and Connectivity products to Channel Partners, Resellers, and OEMs. With more than 9 years of direct industry experience, our products are resident in the most demanding and mission critical functional networks Worldwide. We serve as a Master Distributor to the largest CMs in the world and deploy the most rigorous testing and firmware management programs to bring the highest level of functional product to the market at a cost that makes sense.

Corporate Offices: **Approved Networks, Inc.**

Tel: 800.590.9535

Web: <http://www.approvednetworks.com>